


The SOLIDWEDGE™ is a breakthrough technology that allows conduction cooled modules to operate at higher thermal loads in higher temperature environments.

## OPTIMIZED FOR VITA 48.2 AND cPCI



## POSITIVE RETRACTION

Adjacent wedge segments are connected to prevent a stuck wedge lock. Turning the drive screw counterclockwise retracts the threaded drive wedge, pulling each of the connected segments down to their relaxed position.

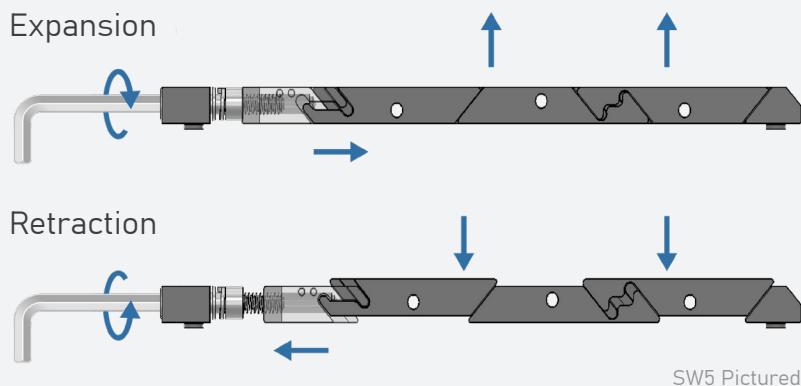

The SOLIDWEDGE™ design provides three times the thermal contact area of conventional wedge locks. The design also features a larger screw size, which creates higher contact forces between the heat frame and cold wall surfaces, significantly improving thermal performance.

The interconnected links of the SOLIDWEDGE™ feature positive retraction of all segments without the use of springs or other mechanisms.

## THERMAL RESISTANCE

0.18 °C/W Resistance per Card Edge

## FEATURES

- 700 lb Clamping Force
- Mass: 13 g
- #6 Drive Screw
- Zero Insertion Force
- Low Profile Design
- Self-Retracting Segments
- Superior Plating Endurance
- Optimized for VITA Specifications
- Models Available for Download
- Torque to 6-10 in-lbs

## MATERIALS

Active Wedge Segments: 6061-T6511

Front Mounting Block: 7075-T7351

Screws, Nuts, Washers:

300 Series Stainless Steel  
(passivated per AMS - 2700)

## 3D MODEL:

<https://a360.co/3Zu6ewe>

## PART NUMBER BUILDER



Required


<b>SW5</b>	<b>48</b>	<b>- 225</b>	<b>- 225</b>	<b>- XXX</b>	<b>- XX</b>	<b>- B075</b>	<b>- YY</b>	<b>-</b>										
Wedge:	Spacing:	Height: 0.225"	Width: 0.225"	Hex:	Finish:	1	2	3										
4.8" MOUNTING HOLE SPACING				BOSS LENGTH 0.075"														
SW - SOLIDWEDGE			3/32" HEX KEY - [332] M2.5 HEX KEY - [M25] 7/64" HEX KEY - [764]			[BV] - BELLEVILLE WASHERS [NL] - NYLOK LOCK PATCH [HC] - HELICOIL INSERTION												
<table border="1"> <tr><td>BLACK ANODIZE PER MIL-A-8625, TYPE II, CLASS 2</td><td>[BA]</td></tr> <tr><td>HARD BLACK ANODIZE PER MIL-A-8625, TYPE III, CLASS 2</td><td>[BH]</td></tr> <tr><td>CHEMICAL FILM CLEAR</td><td>[CC]</td></tr> <tr><td>CHEMICAL FILM GOLD</td><td>[CG]</td></tr> <tr><td>ELECTROLESS NICKEL</td><td>[EN]</td></tr> </table>									BLACK ANODIZE PER MIL-A-8625, TYPE II, CLASS 2	[BA]	HARD BLACK ANODIZE PER MIL-A-8625, TYPE III, CLASS 2	[BH]	CHEMICAL FILM CLEAR	[CC]	CHEMICAL FILM GOLD	[CG]	ELECTROLESS NICKEL	[EN]
BLACK ANODIZE PER MIL-A-8625, TYPE II, CLASS 2	[BA]																	
HARD BLACK ANODIZE PER MIL-A-8625, TYPE III, CLASS 2	[BH]																	
CHEMICAL FILM CLEAR	[CC]																	
CHEMICAL FILM GOLD	[CG]																	
ELECTROLESS NICKEL	[EN]																	
See last page for more plating info																		

RECOMMENDED PART NUMBER: SW5-48-225-225-332-BA-B075-BV-HC

## MOUNTING DETAILS

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES.  
TOLERANCES:  
TWO PLACE DECIMAL:  $\pm .01$   
THREE PLACE DECIMAL:  $\pm .005$

EXPANSION DETAILS  
  
 NOMINAL EXPANSION: .025"  
  
 MAXIMUM EXPANSION: .050"

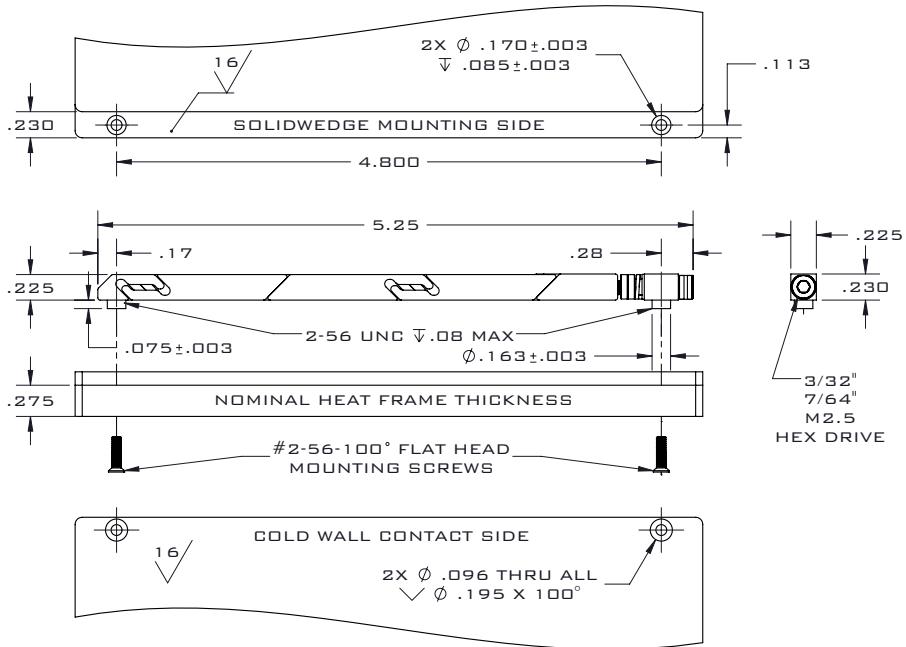

Standard material specs for WaveTherm's SOLIDWEDGE™, injector/ejectors, and OpenCOTS products.

## ASSEMBLY HARDWARE

### 300 SERIES STAINLESS STEEL

Compliance	Specification	Use Case
✓ DFARS	Passivated per	Standard material for screws, nuts, washers,
✓ RoHS	AMS-2700	and SOLIDWEDGE™ straps in WaveTherm product
✓ REACH		assemblies.



## ALUMINUM PLATING

### BLACK ANODIZED - BA

Compliance	Specification	Properties and Use Case
✓ RoHS	MIL-A-8625	Provides reliable corrosion resistance and durability.
✓ REACH	Type II Class 2	Ideal for use in demanding applications requiring high insertion/extraction counts.



### BLACK ANODIZED HARDENED - BH

Compliance	Specification	Properties and Use Case
✓ RoHS	MIL-A-8625	Provides superior corrosion resistance and high durability. Ideal for use in harsh and rugged environments with high insertion/extraction counts.
✓ REACH	Type III Class 2	



### CHEMICAL FILM CLEAR - CC

Compliance	Specification	Properties and Use Case
✓ RoHS	MIL-DTL-5541	Provides good corrosion resistance and electrical conductivity with lower durability. Not ideal for high insertion/extraction counts.
✓ REACH	Type II Class 1A Clear	



### CHEMICAL FILM GOLD - CG

Compliance	Specification	MIL-C-5541	Properties and Use Case
✗ RoHS	MIL-DTL-5541		Provides good electrical conductivity with lower durability. Not suited for high insertion/extraction counts.
✗ REACH	Type I Class 1A Gold	or* Class 1A Gold	



### ELECTROLESS NICKEL - EN

Compliance	Specification	AMS-C-26074	Properties and Use Case
✓ RoHS	MIL-C-26074		Provides excellent thermal performance and excellent electrical conductivity. Ideal for high-performance thermal management.
✓ REACH	Class 4 Grade B	or* Class 4 Grade B	




Images for demonstration only

\*varies based on plating vendor's certificates of conformance

## SOLIDWEDGE™ INSTALLATION


1

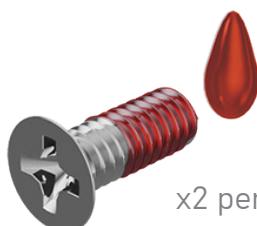

x2 per SOLIDWEDGE

Apply Loctite 2760 to #2-56-100° flat head mounting screws (not included)

2

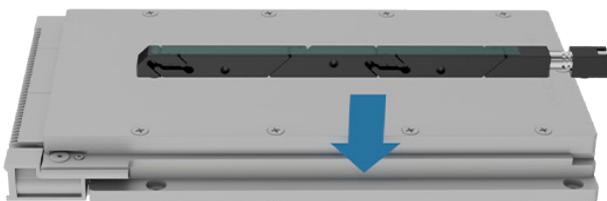


Align SOLIDWEDGE to mounting hole locations

3




Install screws and torque to 2 in-lbs. Ensure mounting screw doesn't hit drive screw.  
(reference mounting drawing for max thread engagement)

4

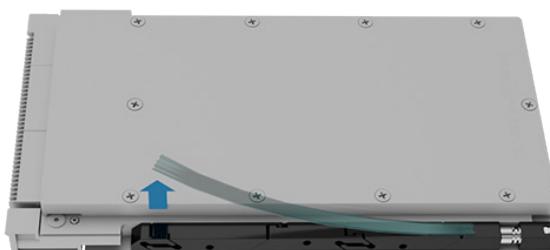


Remove mounting tape from SOLIDWEDGE

## CHECK INSTALL

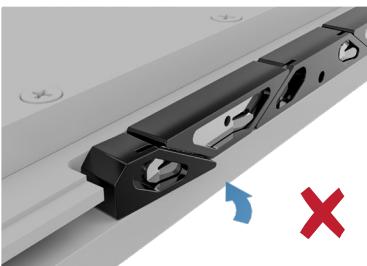

Check alignment on both mounting blocks after torquing and press to straighten if necessary.

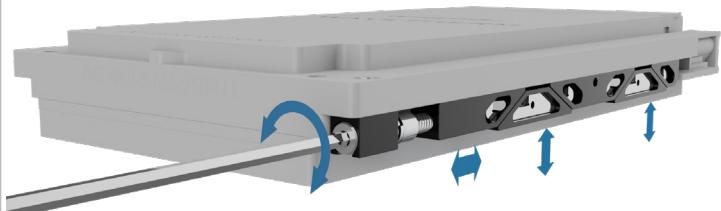

Ensure SOLIDWEDGE is functioning correctly by expanding and contracting with a hex key.

## WARNING:



SOLIDWEDGEs are not intended to be mounted directly to PCBs. The opposing force of the mounting blocks may result in board damage.